

Printec® 3195

Pre-press advantages

- Knock-out areas without strings
- Fast and accurate cad cutting
- Easy to strip with clear and visible cut lines
- Easy to be handled and re-used


Press room advantages

- No fabrics pattern
- Reduced back trapping
- Softer surface and reduced hardness
- Consistent coating transfer over long runs

MAIN APPLICATION

Coating

Printec 3195: rubber-surface new coating plate, no fabrics

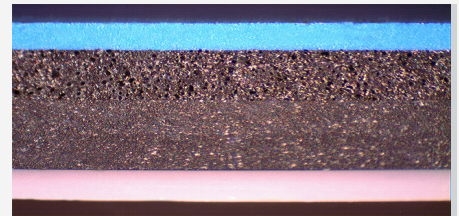

✓ The product at a glance

COMPATIBILITY	Aqueous and UV coatings
PRINTING SURFACE COLOUR	Blue
SURFACE	Rubber
SURFACE ROUGHNESS (Ra micron)	0,6 micron
NOMINAL THICKNESS*	1,95 mm (0,077") +/- 0,05 mm (0,0002").
CARRIER	Polyester
CARRIER THICKNESS	0,35 mm (0,014")
CUTTING DEPTH	1,60 mm (0,063")
ADDITIONAL INFORMATION	
CUTTING ADVISE	CAD cutting into the mylar might reduce mechanical properties of the coating plate

FOR ANY FURTHER DETAILS AND FOR A QUOTATION PLEASE REFER TO YOUR SALES MANAGER OR EMAIL US AT: printingsm@trelleborg.com