


PICT allows users to monitor printer operation and ink usage remotely. It supports better planning by providing real-time data on operational status and performance. PICT helps with scheduled maintenance and preparing for ink refills, ensuring smooth and efficient production.



- ✓ 12,%&"0(,)+" ,)02,'
- ✓ 32\$3/2\$+-,-2+(4)+2\$-"(")*
- ✓ !"#%&'()*+,-./:()0\$)/"\$ etc...

■ Specifications

Item	TS330-3200DS	
Print head	On-demand piezo head	
Print resolution	300, 600, 1200dpi	
Print gap	Manual adjustment by 3 levels (3.0/3.5/4.0 mm)	
Ink set	Type	Sublimation transfer ink Sb411, Sb420
	Color	M, BL, Y, K
	Capacity	2,000 ml/10 kg (when the optional unit is used)
Maximum printable width	3,240 mm (127.5 in)	
Media	Media type	Sublimation transfer paper, textile
	Max. width	3,250 mm (128.0 in)
	Max.thickness	1.0 mm (0.04 in)
	Roll diameter	250 mm (9.8 in)
	Roll weight	100 kg (220.7 lb)
	Core diameter	3 inches
Distance accuracy	Absolute accuracy	±1.5 mm or specified distance ±0.3%, whichever is larger
	Reproducibility	±1.5 mm or specified distance ±0.3%, whichever is larger
Certifications	VCCI-classA, FCC-classA, IEC62368-1 compliant ETL, CE marking (EMC Directive, Low Voltage Directive, Machinery Directive, RoHS Directive), CB certification, REACH, RCM mark, KC certification, UKCA mark	
Interface	Ethernet 1000BASE-T (recommended), USB 2.0 Hi-Speed	
Power	Single-phase 200 to 240 V ±10%, 10A, 50/60Hz ±1%	
Power consumption	Up to 2,400 W (max.), 800 W (during operation), 4.5 W (sleep mode)	
Operation environment	Temperature	20-30 degC (68-86 degF)
	Humidity	35 to 65 % RH (No condensation)
	Guaranteed accuracy temperature	20 - 25 degC (68-77 degF)
Dust level	0.15 mg/m ³ (Equivalent to a general office environment)	
Dimensions (W x D x H)	5,410 mm x 1,075 mm x 1,440 mm (213.0x42.3x56.7 in)	
Weight	925 kg (2039.3 lb)	
Installation space (W x D)	6,500 mm x 3,100 mm (255.9x122.0 in) and more	

Brilliant colors, trusted safety
Sb420 The Sb420 ink is versatile, designed for both direct sublimation and transfer printing.

With a wide colour gamut, it delivers vibrant and expressive print results.

Sb411 ink is also available for sublimation transfer printing.

*For more details, please contact one of our sales offices or sales agencies.

■ Supplies

Item	Code	Remark
Sublimation transfer ink Sb420	Magenta SB420-MD-2L	2L pack
	Blue SB420-BLD-2L	
	Yellow SB420-YD-2L	
	Black SB420-KD-2L	10kg ink tank
	Magenta SB420-MD-BJ	
	Blue SB420-BLD-BJ	
Sublimation transfer ink Sb411	Yellow SB420-YD-BJ	2L pack
	Black SB420-KD-BJ	
	Magenta SB411-MT-2L	
	Blue SB411-BLT-2L	
	Yellow SB411-YT-2L	
	Black SB411-KT-2L	
Magenta SB411-MT-BJ	10kg ink tank	
Blue SB411-BLT-BJ		
Yellow SB411-YT-BJ		
Black SB411-KT-BJ		
Maintenance liquid03	ML003-Z-K1	For routine Maintenance
Flushing liquid03	FL003-Z-22	Flushing liquid for head cleaning
Flushing liquid 03 2 L	FL003-Z-2L	Flushing liquid for ink replacement

■ Options

Item	Code
10 kg ink tank supply unit	A107131/OPT-J0529

■ Software


Raster Link 7

Effortless Printing, Stunning Results.

- Improves the reproducibility of special effects (e.g. transparency) in PDF data
- Increases RIP processing speed of PDF data by an average of 25%
- Utilizes a mail merge print function to customize print jobs
- Supports favorite settings, pop-up logs, and a variety of other functions.

Direct Sublimation and Transfer Sublimation in One Unit

The Way To Extend Your Soft Signage Business

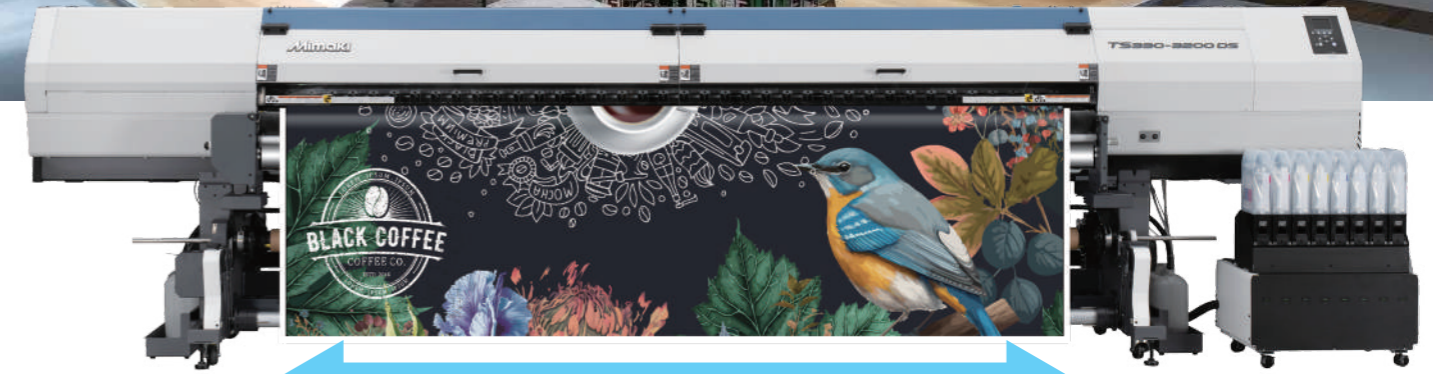

Max. 3.2m

● !,.\$,+0#5+5/.3'5\$+(+0#(5+''/0/,'+/2\$+/20(-('/'2\$)%\$2(')'5'43\$*(-('/'0,)57+%\$5(')+)%+(.\$)5(,)5+50/0\$%+(+0#(5+''/0/,'+/8+9\$+589.'\$0+0,+*#)'\$+:(0#,&0+),0("\$+<-2+0\$#)('/'+(.32,=\$.)057+\$0">6+?#\$+*,23,2/0\$+/,.\$5+/'%+.\$2'%)%(5\$+/,.\$5+/,2(00\$)+,)+0#(5+''/0/,'+/2\$+0#5+02/)%\$. /24+,+2+\$*(50\$2\$%+02/)%\$. /24+,+0#\$+2\$53\$0(=\$+*,23,●(4)50+32(1)0\$25+32(10+85(')+\$@02\$. \$8+-(1)\$+%,057+5,+*,25 /8+=\$28+5(''#0'8+=/28+/-0\$2+2\$3/'\$. \$)0+,+0#\$+32(1)0(')+#5/)%56+A'5,+),0\$+0#0/+(+&5(')+.&'0(3\$+32(1)0\$2+&)(057+*,25+*,&'%+28+5(''#0'8+-2,+),+\$&)(0+0,+0#\$2+&)(0+%&\$+0,+5(''#0+)(=(%&'/%&●?'\$+53\$*(-('/'0,)5+5\$5'2(9\$%+(+0#(5+''/0/,'+/2\$+/5+,-B*0,9\$2+CDCE6


Mimaki MIMAKI ENGINEERING CO., LTD.
mimaki.com 2182-3 Shigeno-Otsu, Tomi-city, Nagano 389-0512, Japan
TEL:+81-268-64-2281

Ball & Doggett

1300 713 567
ballanddoggett.com.au

Mimaki Global Network

USA	MIMAKI USA, INC.	Europe	MIMAKI EUROPE B.V.
Brazil	MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA	Indonesia	PT. MIMAKI INDONESIA
India	MIMAKI INDIA PRIVATE LIMITED	Australia	MIMAKI AUSTRALIA PTY. LTD.
Taiwan	MIMAKI ENGINEERING (TAIWAN) CO.,LTD.	China	SHANGHAI MIMAKI TRADING CO.,LTD.
Singapore	MIMAKI SINGAPORE PTE. LTD.	Thailand	MIMAKI (THAILAND) CO.,LTD.
Vietnam	MIMAKI VIETNAM CO., LTD.		

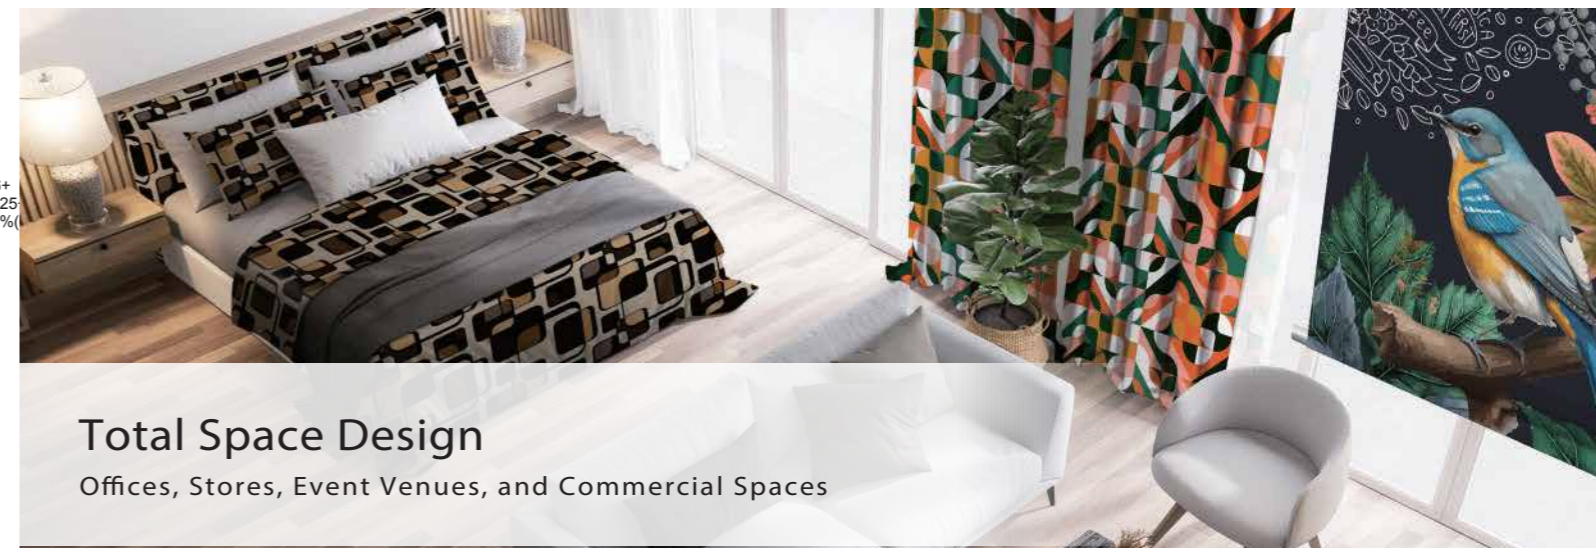

Total Space Design

Offices, Stores, Event Venues, and Commercial Spaces